
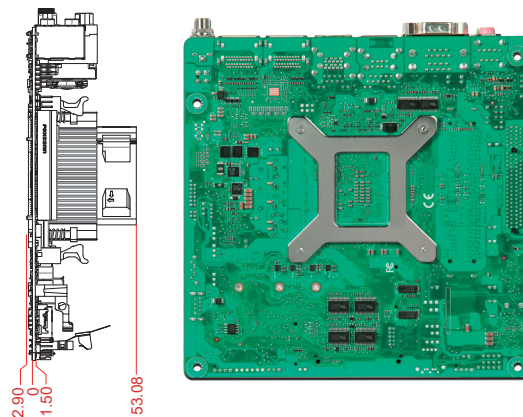


WADE-7220-R2314

AMD Ryzen™ Embedded R2314 APU 搭载
Mini-ITX Board with DP, Dual GbE, USB 3.2
Gen2, SATA III, M.2, CFAST

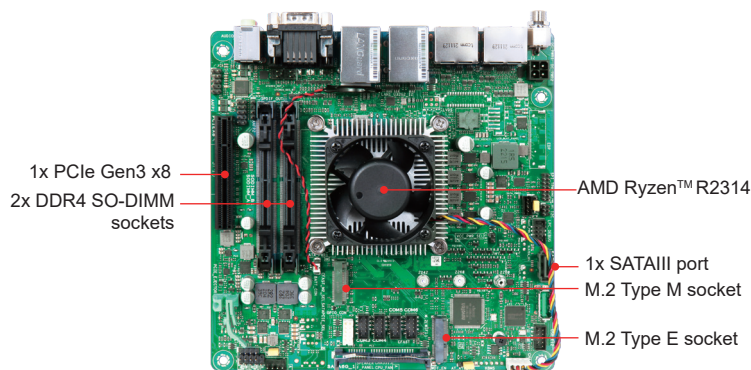


WADE-7220-R2314 基于 AMD Ryzen™ R2314 APU。凭借双通道 DDR4 SO-DIMM 内存和丰富的 I/O 集，Portwell WADE-7220-R2314 Mini-ITX 嵌入式主板为工业自动化应用提供了节能解决方案。

产品特点

- AMD Ryzen™ Embedded R2314 APU
- Two SO-DIMM support DDR4 DRAM up to 32GB
- Support dual Ethernet, 6x COM Ports
- Support 2x USB 3.2 Gen2, 1x USB 3.2 Gen1, 4x USB 2.0, 1x SATAIII port
- Supports 1x PCIe Gen3 x8, 1x CFAST, 2x M.2 socket (Key M & Key E)

REAR I/O

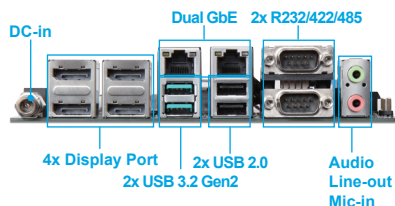

ORDERING GUIDE

AB1-3R27	(R)WADE-7220-R2314. Mini-ITX ESB.AMD Ryzen Embedded R2314 w/DDR4/DP/dual GbE LAN/SATA
----------	---

PACKING LIST

One WADE-7220-R2314 motherboard with Cooler
One I/O shield
One SATA cable

特点

处理器	AMD Ryzen™ Embedded R2314 APU, 2.1 GHz (3.5 GHz turbo), 15W(12-35W) TDP
芯片组	N/A
BIOS	AMI uEFI BIOS
内存	- Support 2x SO-DIMM sockets - Up to 32GB DDR4 2667 MHz memory - Support ECC
储存装置	1x SATAIII ports
看门狗计时	Programmable watchdog timer
硬件监控	Temperature (CPU & System)
扩充接口	- 1x PCIe x8 Gen 3 - 1x M.2 Key E 2230 with PCIe x1 and USB 2.0 for Wireless - 1x M.2 Key M 2242/2260/2280 with PCIe x2 and SATA signal for SSD - 1x CFAST* *If CFAST is enabled, M.2 SATA will be disabled, and vice versa. You may configure this setting in the BIOS.

I/O 界面

音源	-Intel® High Definition Audio interface Realtek® ALC897 High Definition Audio -Audio jack support Line-out/Mic-in -2x 2W Stereo Speaker output -1x 5.1 channel internal pin header
以太网网络	2x RJ45 connectors on rear I/O (Realtek® RTL8111H)
串行端口	-2x RS232/422/485 port on rear I/O -4x RS232 ports on pin header
USB	-2x USB 3.2 Gen2 on rear I/O -2x USB 2.0 on rear I/O -1x USB 3.2 Gen1 Type A vertical connector -2x USB 2.0 on pin header
GPIO	8-bit GPI/GPO

DISPLAY

图像控制	AMD Radeon Vega 6 Graphics
显示器界面	-DP1: resolution up to 3840x2160 -DP2: resolution up to 3840x2160 -DP3: resolution up to 3840x2160 -DP4: resolution up to 3840x2160

Mechanical & Environment

尺寸	170mm(L) x 170mm(W)
电源供应	12~24V DC in (1 x external DC jack; 1 x internal 4 pin power connector)
环境	- Operation Temperature: 0°C to 60°C - Storage Temperature: -20°C to 80°C - Relative Humidity: 10% to 95%, non-condensing
MTBF	Over 100,000 hours at 40°C

