

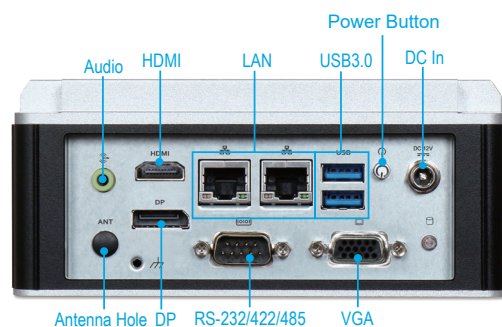


WEBS-2110

嵌入式小型无风扇系统
搭载英特尔凌动x6000E系列 NANO-ITX主板

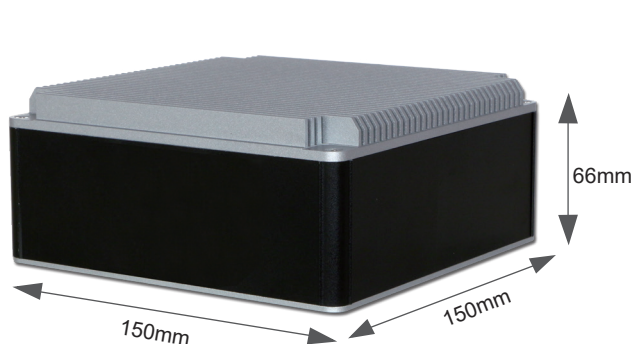

DIN-Rail Mounting Bracket (optional)

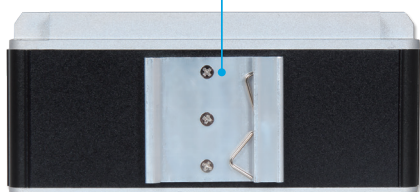

WEBS-2110 具备英特尔凌动 x6000E 系列的优点，特别是双 / 四核心处理能力。高效能、低耗能，高成本效率的处理器打造出的小型无风扇嵌入式系统支持 -20°C~60°C 宽温，适合自动化、医疗、网通、数字广告牌与交互式信息服务站这类应用

产品特色

- 搭载英特尔凌动x6000E系列双/四核心处理器
- 支援 1x 2.5 吋 SSD、1x mSATA、1x Micro SD
- 三显示器 VGA / DP / HDMI
- 1x M.2 与 1x 全尺寸迷你 PCIe 槽 (依照 BIOS 选择 mSATA 或迷你 PCIe)
- 支援壁挂或 DIN Rail 架设
- 支持 -20°C~60°C 宽温无风扇设计
- 12伏 直流电输入



系统

主板	NANO-6063
中央处理器	Intel Atom® Dual/Quad-core x6000E family SoC (up to 12W)
BIOS	AMI UEFI BIOS
内存	DDR4 3200 MT/s Non-ECC SO-DIMM up to 32GB
储存装置	- 1x SATA III port - 1x mSATA socket (Choose either mSATA or mini-PCIe by BIOS) - 1x Micro-SD socket
看门狗定时器	Programmable by embedded controller
硬件状态监控	System monitor (Voltage and Temperature)
扩充	- 1x M.2 Type E socket - 1x full size mini-PCIe socket (Choose either mSATA or mini-PCIe by BIOS) - 2x USB 3.2 Gen 2 ports on board with header (10Gbps)

外部输入/输出

串行端口	1x RS-232/422/485 on board connector (selected by BIOS)
显示器	1x VGA, 1x DP, 1x HDMI
USB	2x USB 3.2 Gen 2 ports (10Gbps)
音源	Audio jack on rear I/O with Line-out and on board pin header with Line-in, Line-out, and Mic-in
以太网网络	- Intel® I210 GbE controller and MaxLinear GPHY215 GbE PHY - Dual RJ45 connectors on rear I/O with two LED indicators
其他	TPM 2.0 on board

电源供应

电源输入	DC 12V
------	--------

环境条件

运作温度	-20°C~60°C
储存温度	-40°C~85°C
相对湿度	95%@40°C, non-condensing
运作振动	5Grms/10~500Hz, IEC 60068-2-6
运作震动	50G, 11msec, IEC 60068-2-27

机构

尺寸	150 x 150 x 66mm
重量	1.4 Kg
架设方式	Wall, DIN-rail mounting

